



Chemical Consultants INCORPORATED

TOP BOND

Water-Based Pallet Adhesive

GENERAL DESCRIPTION

TOP BOND is a high quality water-based pallet adhesive. As a screen printer's adhesive, **TOP BOND** is used on the pallet to secure garments for printing and can be used on belt printers. **TOP BOND** works equally well as a general purpose adhesive on many other substrates including: leather, rubber, paper, plastic, glass, wood, metal and concrete.


ADVANTAGES

- Economical
- Water-based
- Low Odor
- Pressure sensitive
- Repositionable
- Quick Tack / Non-transferable
- No VOC (Volatile Organic Compounds)
- No solvent propellant
- Non-Hazardous / Non-Flammable
- Works on a variety of substrates
- Superior hold for heavy garments
- Heat resistant / not affected by flash cure station

APPLICATIONS

SPRAY APPLICATION

Apply in a quick smooth "S" pattern covering the entire surface. Spray with a hand spray bottle, electric spray gun or air operated unit.

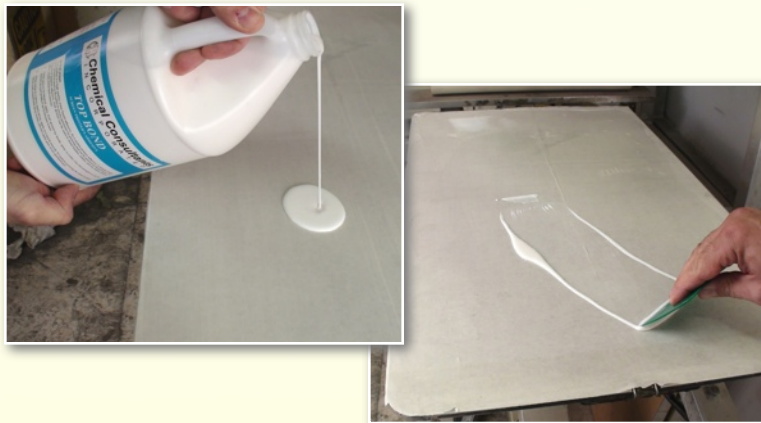

MANUAL

Drop a quarter size amount onto pallet and spread with a plastic spreader or rigid card stock. Cover entire pallet or area large enough to cover print area.

Packaging

1 gallon (9 lb.) 5 gallon pail (42 lb.) 55 gallon drum (480 lb.)

Quick Tip:

Allow **TOP BOND** to become tacky (set-up) prior to securing garments.

Dried / cured adhesive can be cleaned with CCI's **AR-20 (Adhesive Remover)**



ADA 5

Air operated adhesive spray system.