



# Chemical Consultants INCORPORATED

## GR-70

## Textile & Graphic Multi-Purpose Screen Wash

### GENERAL DESCRIPTION

GR-70 is a water soluble ink degradant. It is highly effective on enamel, epoxy, multi-purpose (solvent based), plastisol, poster, UV, water based, and vinyl inks. GR-70 will protect the fabric from deep stains or ghosting from the image print. This makes it much easier when complete reclamation of the screen is necessary. GR-70 can be used in a wide variety of innovative cleaning processes ranging from re-circulation machines, dip tanks, immersion cleaning processes, and automatic reclaiming machines. It can also be applied manually with a scrub pad, spray bottle, or pneumatic pump systems.

GR-70 is also an excellent plastisol ink haze (ghost) remover. It is non-hazardous (non-corrosive) and aggressively removes image stains from the mesh.

### ADVANTAGES

- Low Odor
- High Solvency
- High load capacity to reduce usage
- Non-Hazardous / Non-flammable
- Mesh safe
- Multiple applications


### APPLICATIONS

Always card excessive ink from screen. Use one of the following applications.

#### Quick Tip:

Always pressure wash screen from the bottom and work upwards.

This will prevent ink from locking back onto the mesh when coming in contact with the rinse water.

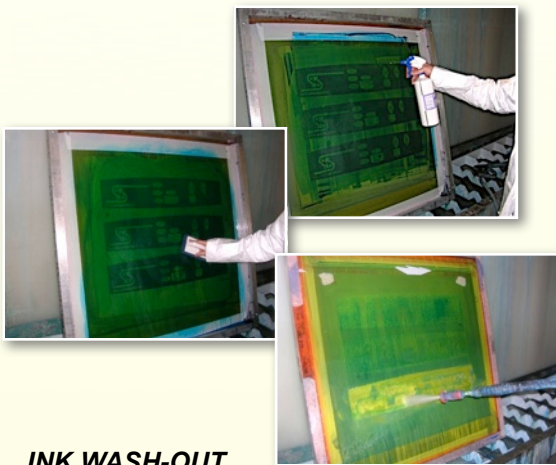

#### INK WASH-OUT AT THE SINK:

Card excessive ink from the screen. Apply GR-70 to ink side of screen. Use a non-abrasive scrub brush or pad to agitate ink on both sides of screen. Finally, rinse away all residue away using high pressure water.



#### Haze Remover:

After ink and emulsion has been removed, spray GR-70 on both sides of the screen. Scrub screen both sides with a non-abrasive brush or pad. Allow product to dwell a few minutes (depending on severity of stain). High pressure rinse screen working from bottom and moving upwards.

#### 4 x 4 Stainless Steel Recirculating Booth

[Click here for more details.](#)



#### RECIRCULATING WASH:

Card excessive ink from the screen. This product can be continuously recirculated until product becomes too heavily soiled with solids. Used product may be filtered and reused.

#### Packaging

1 gallon   5 gallon pail   30 gallon drum   55 gallon drum